SIEMENS

Sinteso™/ Cerberus™ PRO

Input module, input/output modules

FDCI222, FDCIO222, FDCIO224



Input module and input/output modules for the automatically addressed detector line FDnet/C-NET

- Input module FDCI222:
  - Four monitored contact inputs for confirming technical statuses or activating an alarm
- Input/output module FDCIO222:
  - Four control outputs with potential-free relay contacts for activation of fire doors, fans, air conditioning systems, lift controls, etc.
  - Four monitored contact inputs for confirming technical statuses or activating an alarm
- Input/output module FDCIO224:
  - Four control outputs with potential-free relay contacts for the VdS interface in order to activate an extinguisher triggering device
  - Four monitorable contact inputs for confirmation (status messages)
- LED indicator for input/output statuses and for fault, test, localization
- Power supply and communication via FDnet/C-NET (addressed individually)
- Address automatically issued during commissioning
- Two-wire installation for all cable types

Properties

Features

- Transparent housing, ensuring that indicators are easy to see
- Protected electronics
- Integrated line separator
- Chronological status monitoring
- Supply via FDnet/C-NET, auxiliary supply only required if the output is configured as monitored (FDCIO222 and FDCIO224)
- Easy mounting using snap fastener
- Microprocessor-controlled signal processing
- Different mounting options
- For dry areas
- Use additional housing FDCH221 for dusty and humid environments

Eco-friendly


- Environmentally friendly processing
- Reusable materials
- Electronic parts and synthetic materials can be easily separated

FDCI222 input module

- Four inputs for potential-free detector contacts
- Monitoring the input lines for open line and short-circuit with terminating resistors
- Inputs can be configured independently for status or alarm messages using the fire control panel

Fields of application:

To activate four independent, potential-free, normally open or normally closed contacts in order to report technical statuses (e.g., door or fan control) or to activate an alarm (e.g., sprinkler alarm)

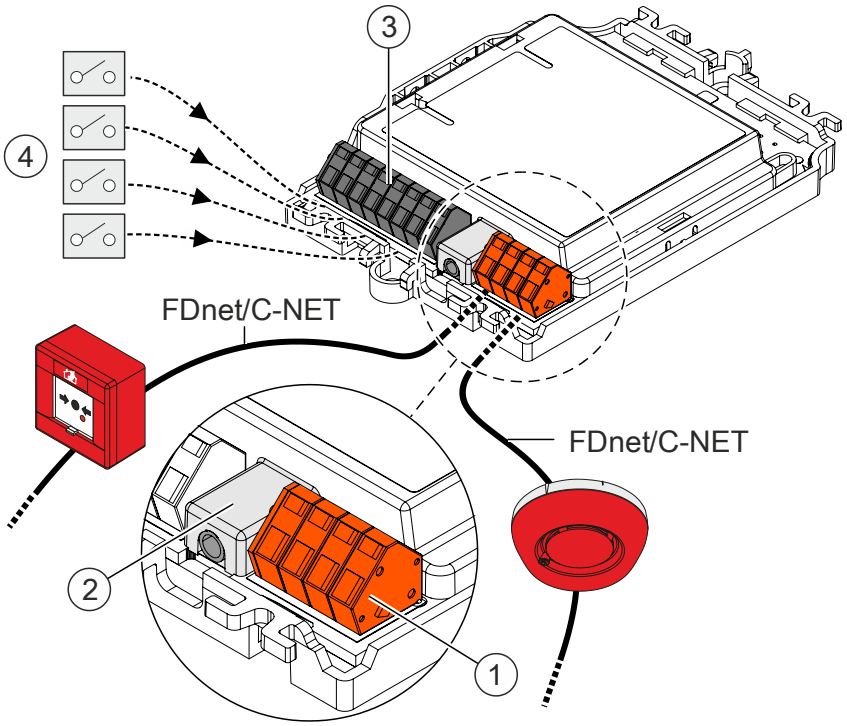


1	Connections for FDnet/C-NET detector line	3	Four contact inputs
2	3.5 mm MC link jack socket	4	Potential-free detector contacts

FDCIO222, FDCIO224 input/output modules

- Four inputs for potential-free detector contacts
- Monitoring the input lines for open line and short-circuit with terminating resistors
- Inputs can be configured independently for status or alarm messages using the fire control panel
- Four outputs with potential-free relay contacts (AC 230 V / 4 A) for fire controls (FDCIO222) and for the VdS interface in order to activate an extinguisher triggering device (FDCIO224)

Fields of application:

- FDCIO222: To activate four independent, potential-free, normally open or normally closed contacts in order to report technical statuses (e.g., door or fan control) or to activate an alarm (e.g., sprinkler alarm)
- For decentralized activation of fire doors, fans and air conditioning systems
- FDCIO224: For the VdS interface in order to activate an extinguisher triggering device

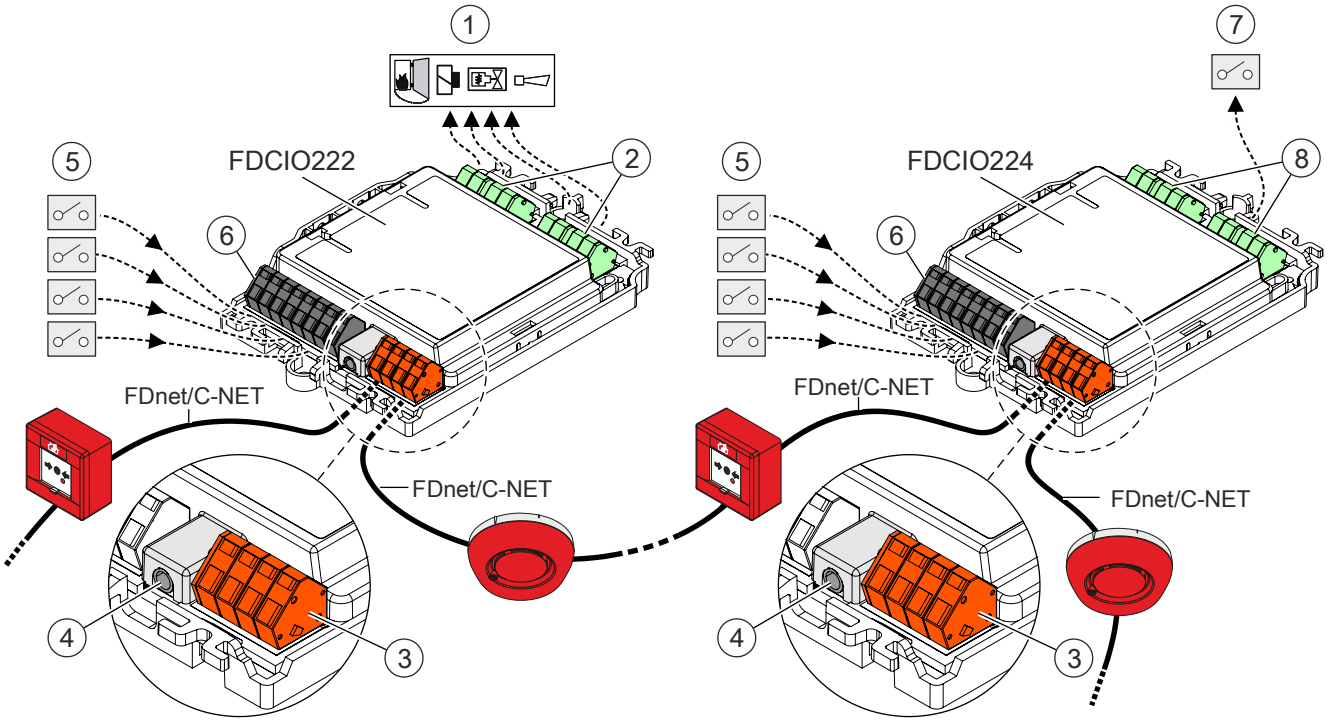

1 Fire controls
2 Four relay outputs AC 230 V / 4 A
3 Connections for FDnet/C-NET detector line
4 3.5 mm MC link jack socket
5 Potential-free detector contacts
6 Four contact inputs
7 VdS interface for extinguishing controls
8 Four relay outputs AC 230 V / 4 A

Type Overview

Type	Designation	Order no.	Weight [kg]
FDCI222	Input module incl. 8 resistors, 2 mounting feet	A5Q00001984	0.098
FDCIO222	Input/output module incl. 8 resistors, 2 mounting feet	A5Q00002369	0.127
FDCIO224	Input/output module incl. 8 resistors, 2 mounting feet, for VdS interface	A5Q00018689	0.127

Accessories for input module FDCI222, input/output modules FDCIO222, FDCIO224

Type	Designation	Order no.	Weight [kg]
FDCH221	Housing with cover, seal, and screws	S54312-F3-A1	0.282
–	M20 x 1.5 metal cable gland	A5Q00004478	0.036
–	M20 metal counter nut	A5Q00004479	0.006
DBZ1190-AB	0.5…2.5 mm^2 (3-pin) connection terminal	BPZ:4942340001	0.001
TS35 (L = 122 mm) TS35 (L = 288 mm)	U-rail TS35/7.5/122 U-rail TS35/7.5/288	BPZ:5644780001 BPZ:5644230001	0.041 0.098

Replacement material for input module FDCI222, input/output modules FDCIO222, FDCIO224

Type	Designation	Order no.	Weight [kg]
FDCM291	Mounting foot	A5Q00003855	0.001

Product documentation

Document ID	Name
008164	Equipment overview Sinteso™ Detector system FD20
008331	List of compatibility (for 'Sinteso™' product line)
A6V10229261	List of compatibility (for 'Cerberus™ PRO' product line)
007023	Technical manual Input module FDCI222, input/output module FDCIO222, FDCIO224
008176	Installation Input/output module FDCIO222, FDCIO224, Housing FDCH221


Related documents such as environmental declarations, CE declarations, etc., can be downloaded at the following Internet address:

http://siemens.com/bt/download

Mounting

Mounting options

- Mounting (series mounting) in a fire control panel on a U-rail TS35
- In housing FDCH221 (accessory) with cover, seal, and screws

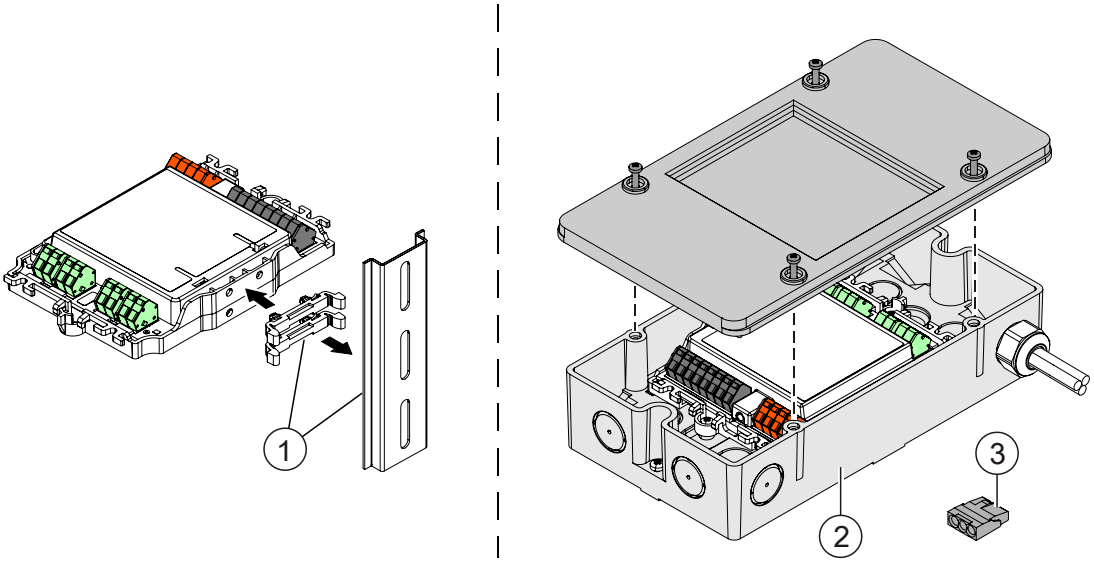


1 Series mounting using mounting feet supplied, on U-rail TS35

2 Mounting in separate housing FDCH221 (accessory)

3 Use auxiliary terminals DBZ1190-AB (accessory) for shielded cables

Disposal



The device is considered an electronic device for disposal in accordance with the European Guidelines and may not be disposed of as domestic garbage.

- Dispose of the device through channels provided for this purpose.
- Comply with all local and currently applicable laws and regulations.

Technical data

	FDCI222	FDCIO222 / FDCIO224
Operating voltage	DC 12…33 V	
Operating current (quiescent)	Max. 0.35 mA	Max. 0.75 mA
Relay output	—	AC 250 V / 4 A, max. 1000 VA DC 30 V / 4 A, max. 120 W
Operating temperature	-25…+60 °C	
Storage temperature	-30…+65 °C	
Air humidity (non-condensing)	≤95 % rel.	
Communication protocol	FDnet/C-NET	
Connections: • Pluggable connection terminals • MC link	0.2…1.5 mm² (with 2.5 mm² connection terminal DBZ1190-AB) Plug connection 3.5 mm jack socket	
Color • Housing • Cover • Housing FDCH221	~RAL 9010, pure white Transparent matt ~RAL 9010, pure white	
Protection category (IEC 60529) • When mounted on a U-rail in a fire control panel • With housing FDCH221	IP30 IP65	
Standards	CEA GEI I-084	

Approvals		**FDCIO222**	**FDCIO224**
• VdS	G204028	G204029	G207001
• LPCB	531m/01	531m/02	—
• FM	3029351	3029351	3029351
• DNV GL (Marine)	MEDB00003UU	MEDB00003UU	MEDB00003UU

System compatibility • FDnet • C-NET	FS20, AlgoRex, SIGMASYS FS720


08 CE 0786	**FDCI222**	Siemens Schweiz AG; Theilerstrasse 1a CH-6300 Zug Technical data: see doc. **007023**
FDCI222 - Input/output device incl. short-circuit isolator for use in fire detection and fire alarm systems installed in buildings.		
305/2011/EU (CPR): EN 54-18 / EN 54-17 ; 2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2011/65/EU (RoHS): EN 50581		
The declared performance and conformity can be seen in the Declaration of Performance (DoP) and the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or https://siemens.com/bt/download		
DoP No.: 0786-CPR-20446; DoC No.: CED-FDCI222		

08 CE 0786	**FDCIO222**	Siemens Schweiz AG; Theilerstrasse 1a CH-6300 Zug Technical data: see doc. **007023**
FDCIO222 - Input/output device incl. short-circuit isolator for use in fire detection and fire alarm systems installed in buildings.		
305/2011/EU (CPR): EN 54-18 / EN 54-17 ; 2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2014/35/EU (LVD): EN 60950-1 ; 2011/65/EU (RoHS): EN 50581		
The declared performance and conformity can be seen in the Declaration of Performance (DoP) and the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or https://siemens.com/bt/download		
DoP No.: 0786-CPR-20447; DoC No.: CED-FDCIO222		


08 CE 0786	**FDCIO224**	Siemens Schweiz AG; Theilerstrasse 1a CH-6300 Zug Technical data: see doc. **007023**
FDCIO224 - Input/output device incl. short-circuit isolator for use in fire detection and fire alarm systems installed in buildings.		
305/2011/EU (CPR): EN 54-18 / EN 54-17 ; 2014/30/EU (EMC): EN 50130-4 / EN 61000-6-3 ; 2014/35/EU (LVD): EN 60950-1 ; 2011/65/EU (RoHS): EN 50581		
The declared performance and conformity can be seen in the Declaration of Performance (DoP) and the EU Declaration of Conformity (DoC), which is obtainable via the Customer Support Center: Tel. +49 89 9221-8000 or https://siemens.com/bt/download		
DoP No.: 0786-CPR-20448; DoC No.: CED-FDCIO224		

Dimensional drawings

Input module FDCI222
Input/output module FDCIO222, FDCIO224

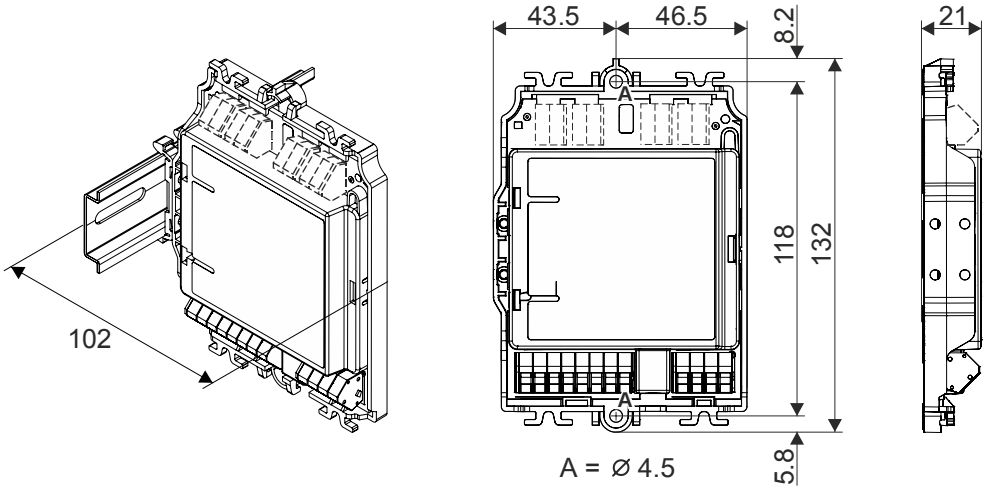

Housing FDCH221

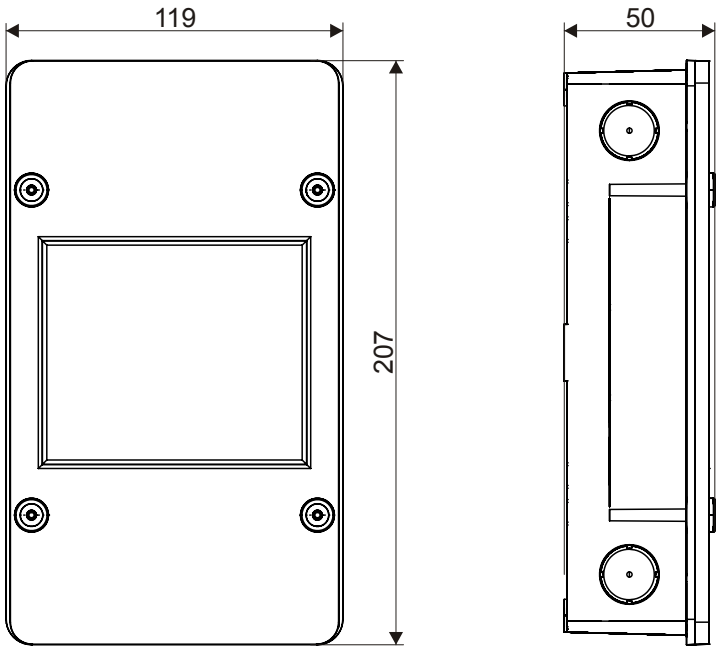

Issued by
Siemens Switzerland Ltd
Building Technologies Division
International Headquarters
Theilerstrasse 1a
CH-6300 Zug
Tel. +41 58 724 2424
www.siemens.com/buildingtechnologies

© Siemens Switzerland Ltd, 2014
Technical specifications and availability subject to change without notice.